

High lift jacks 1,5 - 2 ton



Accessories

1002 LF




Rubber pad protects the shape and coating of the lifting point.

60245



Hard rubber wheels recommended to reduce the risk of damaging smooth, painted or tiled floors. (Factory mounted)

1 2

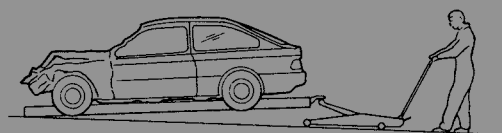

Ideal for loading and unloading body jigs. (Chassis alignment systems).

	Model	Max (Ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Kg
①	1.5T-HC	1.5	98	800	1050	160	380	925	52
②	2T-HC	2	98	735	1035	200	380	1045	53

