




SOLLEVATORI OLEOPNEUMATICI A CARRELLO AIR HYDRAULIC TROLLEY JACKS

	Mod. YAK 109/C
	•
	•
	•
	•
	•
	•
	•

Sollevatore Oleopneumatico a carrello, pratico e maneggevole. Rientro automatico del braccio; le due valvole di discesa garantiscono una tenuta perfetta in ogni situazione e una velocità controllata sotto carico. La combinazione tra altezza minima, altezza massima e portata lo rendono versatile e particolarmente indicato per autovetture, camper, furgoni, autocarri medi, rimorchi e tutti i mezzi con una massa complessiva non superiore ai 12t. (13.2 ton) Ideale per officine, gommisti e carrozzerie.

Air hydraulic trolley jack, practical and easy to handle. The arm moves back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load. Thanks to minimum height, maximum height and capacity these jacks are flexible and particularly suitable for cars, campers, vans, medium sized lorries, trailers and all vehicles weighing no more than 12t. (13.2 ton) Ideal for workshops, tyre repairers and bodywork shops.

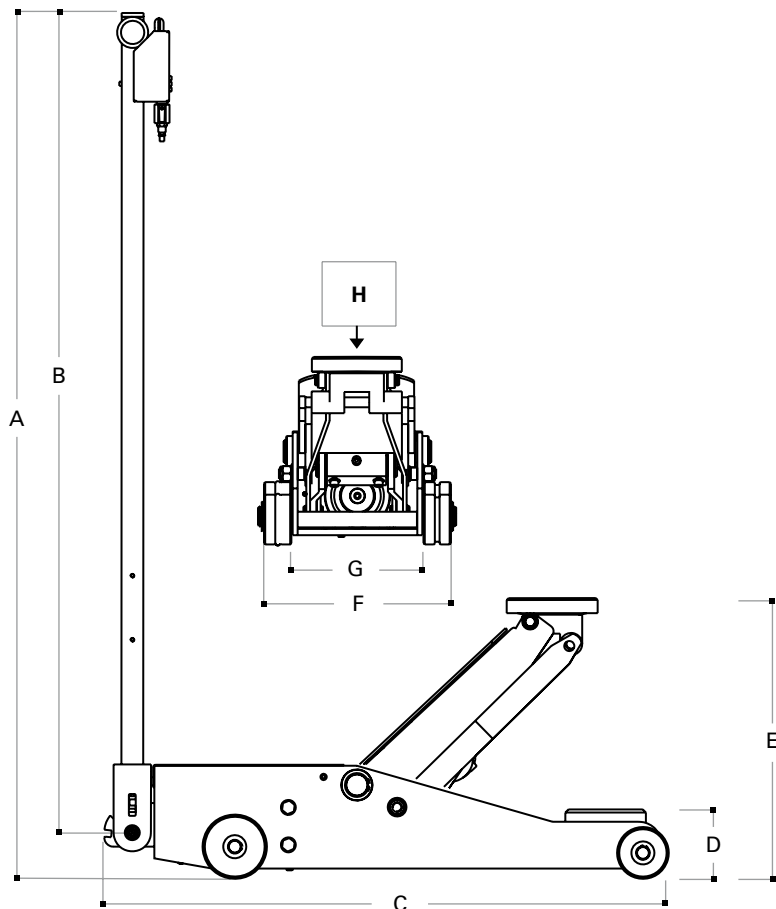

YAK 109/C



	YAK 109/C
Portata Capacity	5 t <i>5.5 ton</i>
Peso netto Net weight	75kg <i>165 lb</i>
Pressione di alimentazione Working air pressure	8-10 bar <i>116-145 psi</i>
Consumo d'aria Air waste	400 nl/min
A	1400 mm <i>55.12 in</i>
B	1310 mm <i>51.57 in</i>
C	890 mm <i>35.04 in</i>
D	90 mm <i>3.54 in</i>
E	500 mm <i>16.69 in</i>
F	320 mm <i>12.6 in</i>
G	208 mm <i>8.19 in</i>
H	5 t <i>5.5 ton</i>