

SOLLEVATORE OLEOPNEUMATICO AIR HYDRAULIC JACK



	Mod.	
	YAK 135	YAK 330/N
	•	•
		•
		•
		•
		•
		•
		•
		•
		•
		•
	•	•
	•	•
	•	•
	•	•
	•	•
	•	•

Sollevatori Oleopneumatici per mezzi pesanti, pratici ed efficaci. Rientro automatico dei pistoni; le due valvole di discesa garantiscono una tenuta perfetta in ogni situazione e una velocità controllata sotto carico. YAK 135 Ideale per mezzi agricoli e macchine operatrici. Dotato di piastra antiribaltamento e a richiesta di ruote pneumatiche per operazioni su terreni con particolari difficoltà. YAK 330 Specifico per il sollevamento del mezzo dal telaio e per tutte le operazioni dove occorrono molta corsa e molta portata. Accessori a richiesta: ruote pneumatiche.

Air hydraulic jacks for heavy vehicles, practical and effective. The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load. YAK 135 Ideal for agricultural and public works vehicles. Fitted with roll-over protection plate and, on request, pneumatic wheels for working on particular difficult terrain. YAK 330 Specific for lifting the vehicle from the chassis and for all operations where maximum stroke and capacity are required. Accessories on request: pneumatic wheels.

ACCESSORI DI SERIE - STANDARD ACCESSORIES

	Cod.
	1x PS1PIATT-F10001
	1x PS1PROLU-F10001
	1x PS1PROLU-F10002



YAK 135

YAK 330/N



YAK 135
YAK 330/N


RUOTE PNEUMATICHE
PNEUMATIC WHEELS



YAK 135



YAK 330/N

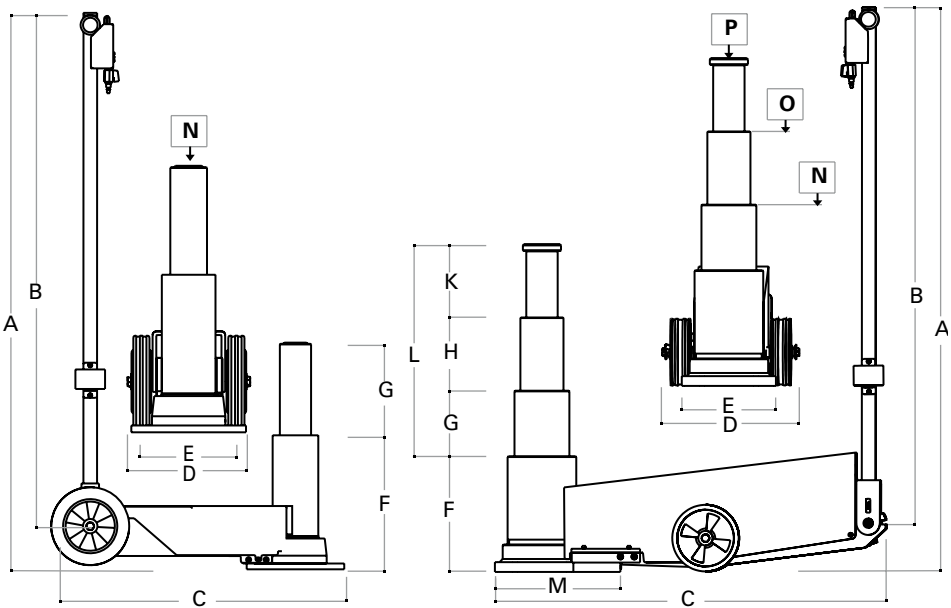

	YAK 135	YAK 330/N
Portata Capacity	30 t 33 ton	80-50-25 t 88-55-28 ton
Peso netto Net weight	57 kg 126 lb	146 kg 322 lb
Pressione di alimentazione Working air pressure	8-10 bar 116-145 psi	8-10 bar 116-145 psi
Consumo d'aria Air waste	400 nl/min	600 nl/min
A	1415 mm 55.71 in	1430 mm 56.3 in
B	1315 mm 51.77 in	1320 mm 51.97 in
C	725 mm 28.54 in	1000 mm 39.37 in
D	275 mm 10.83 in	350 mm 13.78 in
E	250 mm 9.84 in	240 mm 9.45 in
F	350 mm 13.78 in	300 mm 11.81 in
G	230 mm 9.06 in	165 mm 6.5 in
H		170 mm 6.69 in
K		190 mm 7.48 in
L		525 mm 20.67 in
M		320 mm 12.60 in
N	30 t 33 ton	80 t 88 ton
O		50 t 55 ton
P		25 t 28 ton