




»» Mobile Column Lift
EHB® DC 907 / 908 wireless


Lift vehicles anywhere and everywhere – without cables and power supply.

If indoors or outdoors, with the battery driven lifting column EHB® DC wireless you are independent from an electrical power supply and can move absolutely freely. No cable connections, no obstructions – this lift system provides you with the optimum in mobility and flexibility. You can have a lifting capacity of up to 8200 kg per column.




Radio controlled

Wireless communication of columns via radio control. No troublesome cable connections.

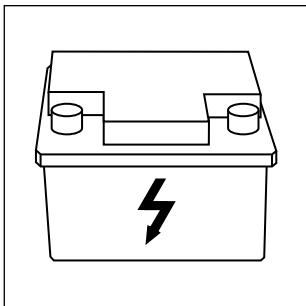


Independent battery drive

The power supply of the columns is by maintenance-free batteries, can work several days without recharging.

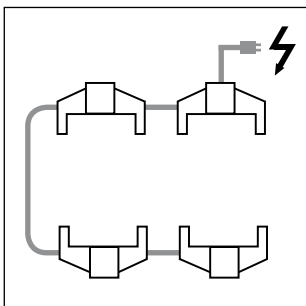


EasyCharge

Simple charging of batteries with only one 230V mains per lift set. Charging is also possible during Lift operation.

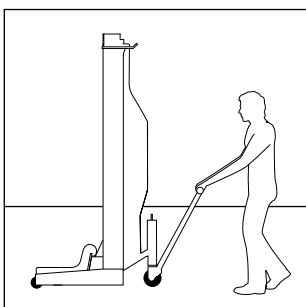

Easy to move

The column can be manoeuvred by one person with ease.

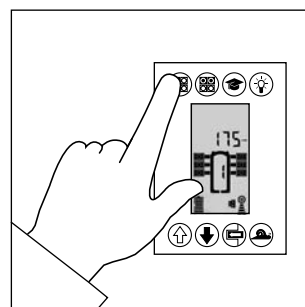


Simple operation

Operate from each column. Large LED display with clear illustration of the complete lift set.

INFO:
www.finkbeiner.eu
www.finkbeiner.co.uk


Flexible combinations

Up to 10 columns can be combined within one lift set, or separated into several lift sets. Up to 10 lift sets can work side by side.

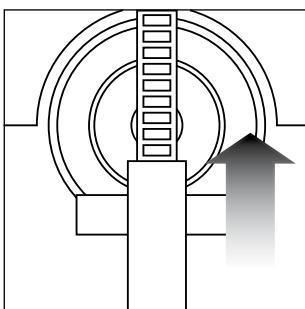


Accurate and smooth synchronisation

Soft start, operation works with smooth increase of speed and load-protection. Synchronisation is without any increments. Fast and slow speed operation.

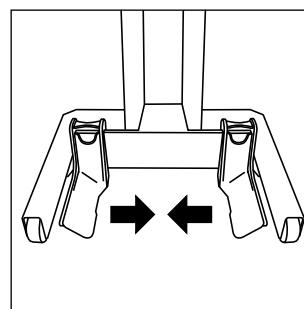

Individually adjustable

Adjustable wheel forks, no wheel adaptors required, also suitable for super-singles.

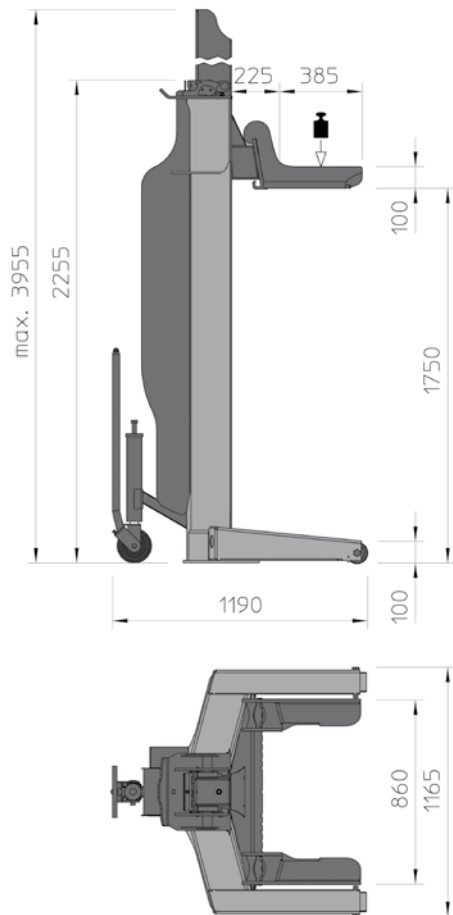

Technical data

Column Lift EHB 907/908 V11 DC – wireless

Capacity per column:	EHB 907 DC – 7500 kg EHB 908 DC – 8200 kg
Load support:	Adjustable wheel fork, Ø 550-1140 mm, Length 385 mm (for super singles)
Lifting stroke:	1750 mm effectively
Time up / down:	Up 90 sec., Down 60 sec. (approx.)
Operation:	Up / Down Fast/ slow speed All / Single / Pair / Group Max. 10 columns per lift set Max. 10 lift sets can run parallel Configuration of columns with permanent memory LCD display
Control:	Wireless communication via radio control Synchronisation via proportional valve technology
Drive:	Electro-hydraulic EHB 907 DC – 2.2 KW EHB 908 DC – 3 KW
Power supply:	Batteries, 24 V, 100 Ah, maintenance-free
Battery charging:	Connection 230 V AC, 50 Hz, 1.5 Amp Integrated charging cable of 10 m. Up to 6 columns can be charged with one mains supply
Weight:	540 kg
Protection:	IP 65 / IP 44 during charging
Standards:	CE, EN1493
Patents Pending.	

Finkbeiner®

Walter Finkbeiner GmbH

Alte Poststrasse 9-11 • 72250 Freudenstadt • Germany

Fon +49 (0) 7441-40 31 • Fax +49 (0) 7441-877 78

info@finkbeiner.eu • www.finkbeiner.eu

